


Network Systems ► Wall-mounted Distributor ► Wall-mounted Distributor ODB/24-C

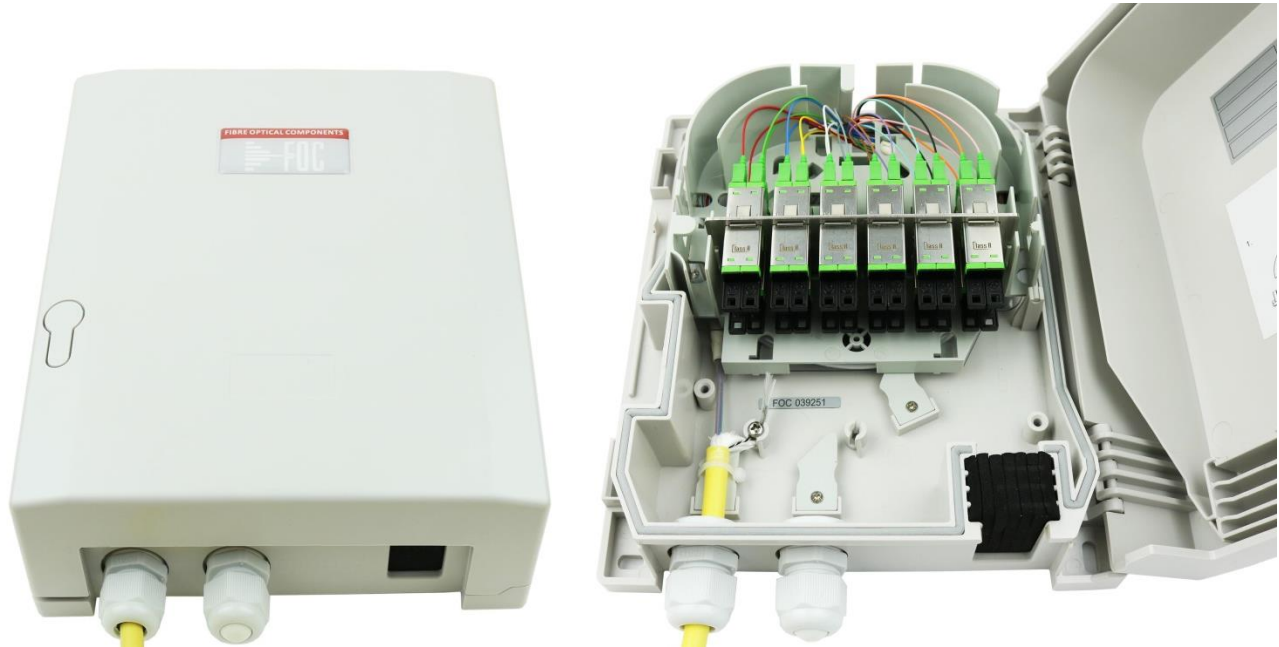

General Information

The ODB/24-C is a compact wall-mounted distributor for outdoor applications. It can hold up to 24 ports and up to 24 splices in a hinged cassette. Moreover it is possible to accommodate power splitters and wavelength division multiplexers for WWDM-, CWDM- or DWDM-solutions for FTTH. The housing enables an easy and quick installation as well as the installation of a safety lock half length.

Features

- Wall-mounted distributor for outdoor applications
- Robust and high-quality plastic housing
- Adapter plate for up to 24 ports of the type LSH (Class A), SC (Class A) or LC (Class A) (other connector standards on request)
- Splice storage system for the accommodation of up to 24 splices or couplers/filters
- Integrated patch cable entry for a large number of cords
- Patch cable output with flexible slat seal

- Integration of a gas stopper is possible
- Available also with installed lead-in connectors and pigtails, ready for splicing (on request)
- Possibility to install a safety lock half length
- Standard M20 cable glands (up to max. 11 mm cable diameter)
- Optional M25 cable glands (up to max. 17 mm cable diameter)

Dimensions

- 200 x 235 x 67 mm

Material

- ASA, structured

Colour

- RAL 7035

IP Rating

- IP 54

Dimensions

